


## Bus-bar Insulate Connector



### SPECIFICATIONS

Values	Style					
	SM-25	SM-30	SM-35	SM-40	SM-51	SM-76
Tensils strength (1bs)	500	550	600	650	1000	1500
Torgue strength(ft 1bs)	6	8	10	10	20	40
Voltage withstand (kV)	6	8	10	12	15	25
Screw (mm)	6	8	8	8	8	10
Weight (g)	28	44	50	86	83	233

## Electric Cable Tangency

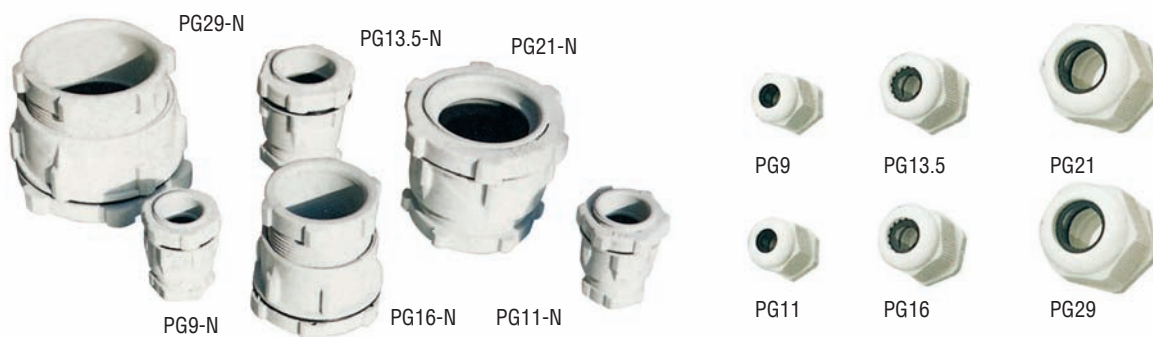

### SPECIFICATIONS

Type	PG7	PG9	PG11	PG13.5	PG16	PG21	PG29	PG36	PG42	PG48
Diameter (mm)	3-6.5	4-8	5-10	6-12	10-14	13-18	18-25	22-32	30-33	34-44
Screw length (mm)	8	8	8	9	10	11	11	13	13	13