

KT H.I.D Flood lamps


APPLICATIONS

Garden, avenues.

SPECIFICATIONS


CE, ISO9000

1. Series : 70W-2000W;
2. Operating voltage: 220-240V/50Hz, 110-130V/60Hz;
3. Finish: Black, White, Grey;
4. Material: Die casting aluminum;
5. IP rating: IP54, IP65;
6. The lighting tube, ballast and starter, ignitor can be fitted according to client's request;
7. Packaging details: 1PC/CTN, Standard export carton.




150W 78mm

KT-1008




150W(500W)
78mm(118mm)

KT-1018a(b)




500W 118mm

KT-1023




250/400W E40

KT-2069





1000W E40

KT-1018a(b)




2000W E40

KT-1023

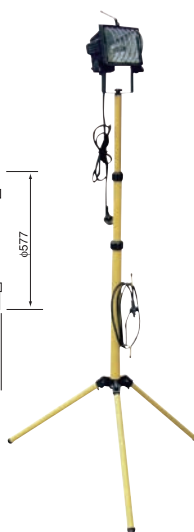

1x500W 118mm

KT-1029

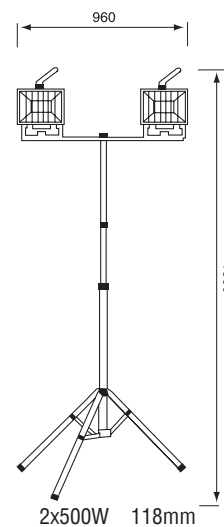

2x500W 118mm

KT-1032